



E-FLEX **BLUE**




Blue Heat Treatment provides superior strength while maintaining flexibility to negotiate all canals

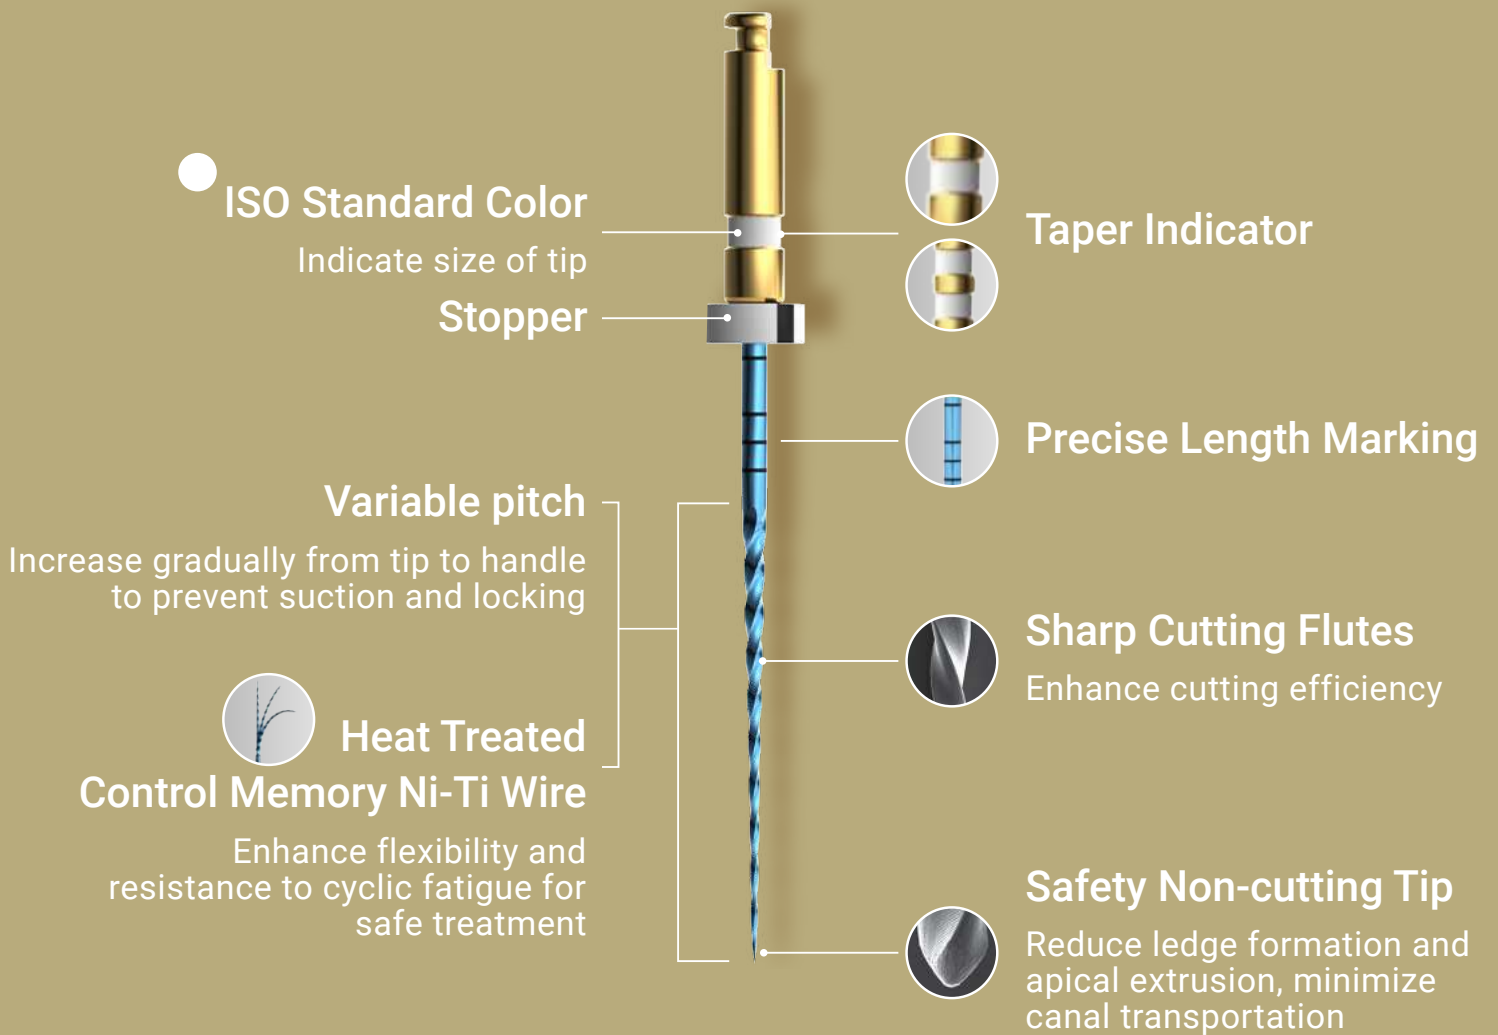


• Usage Protocol

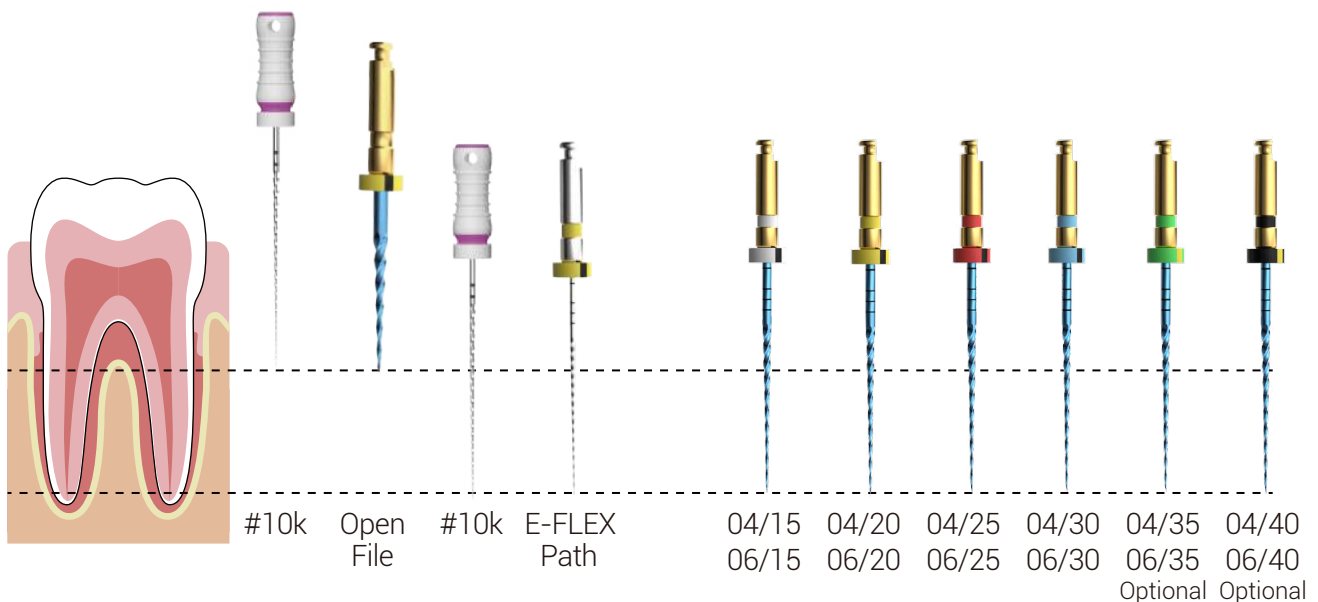

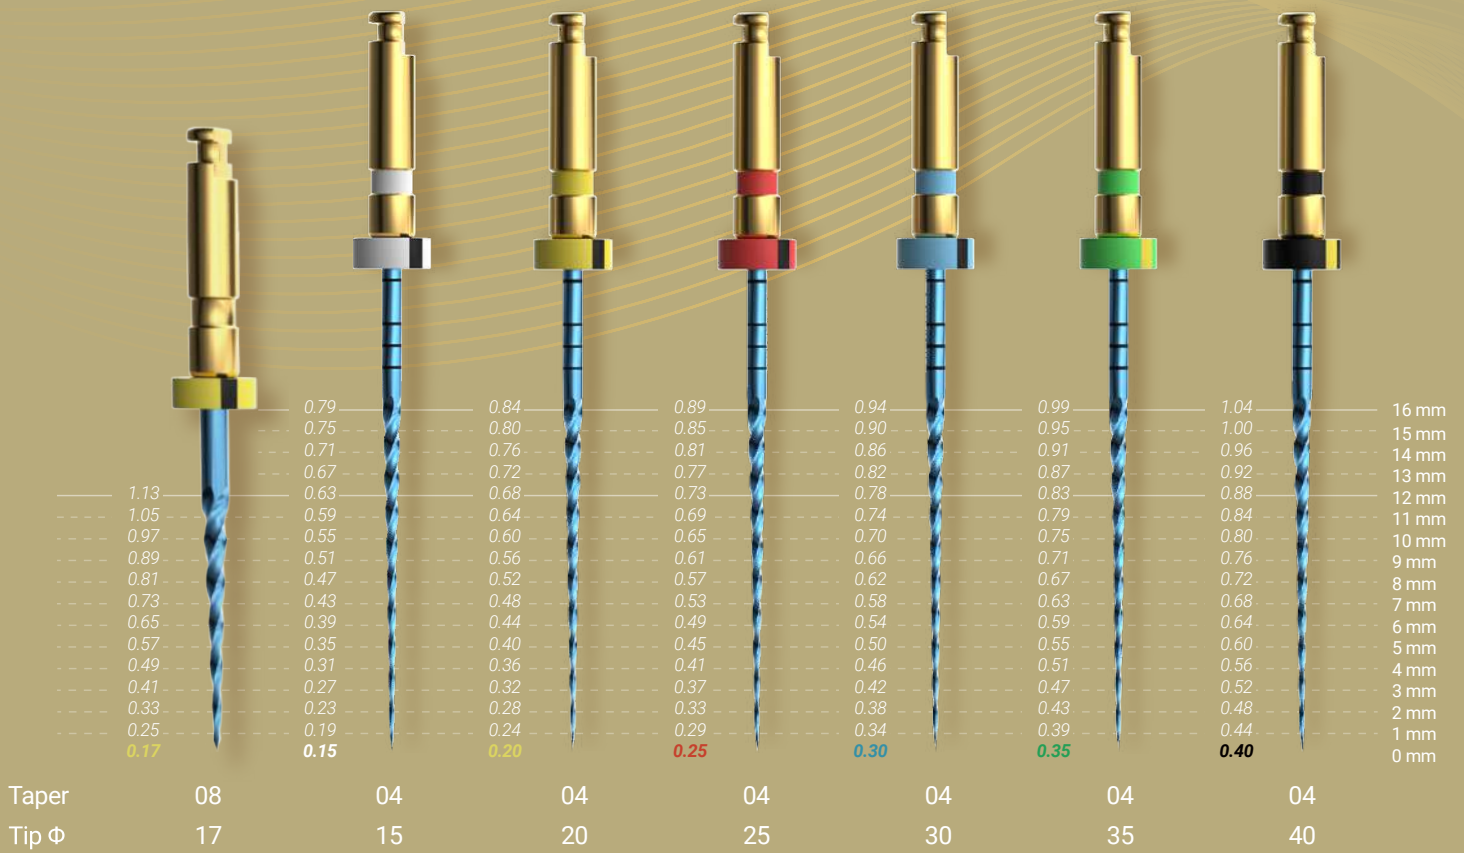


	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX BLUE	●	17	8			19	300 rpm, 3 N·cm
	○	15	4			21/25/31	350 rpm 2.5 N·cm
	●	20	4				
	●	25	4				
	●	30	4				
	●	35	4				
	●	40	4				

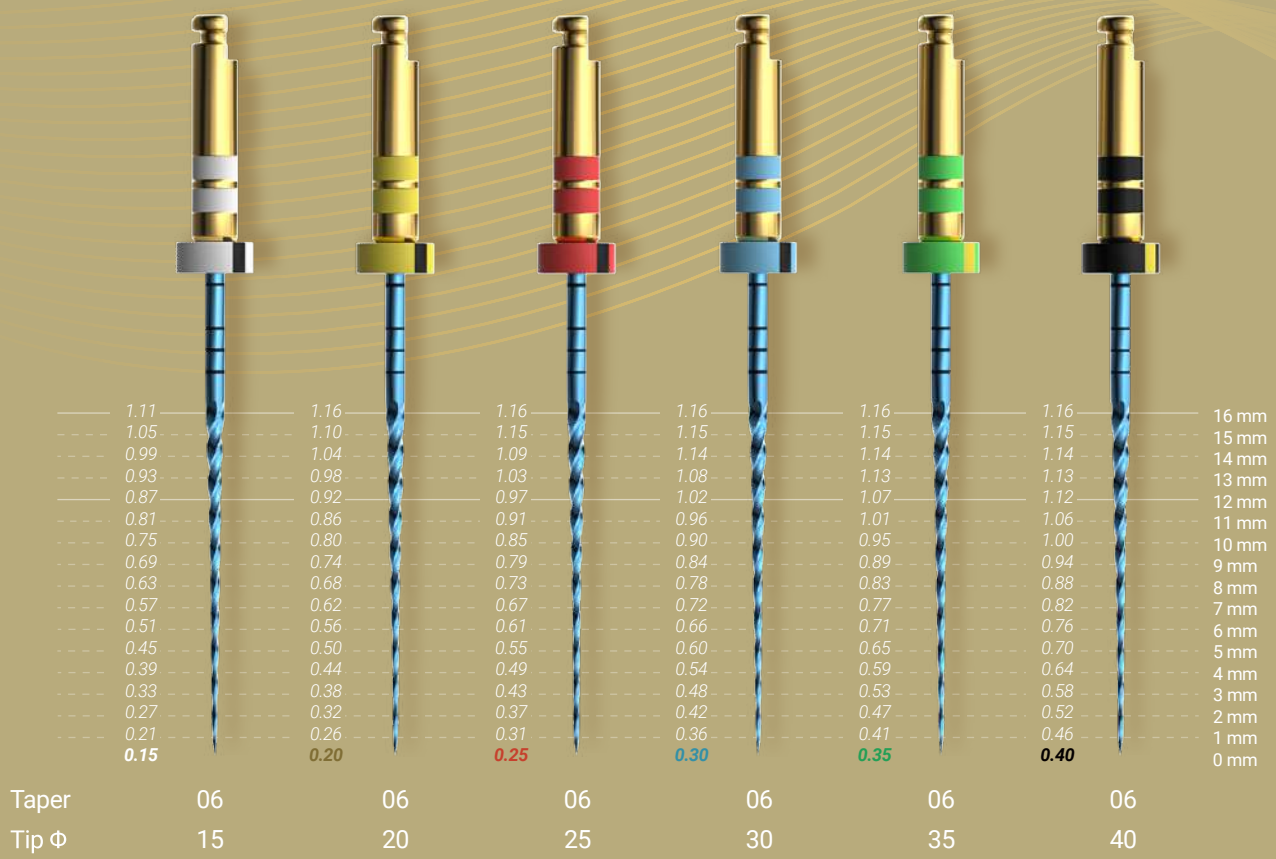


	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX BLUE	○	15	6			21/25/31	350 rpm 2.5 N-cm
	●	20	6				
	●	25	6				
	●	30	6				
	●	35	6				
	●	40	6				

E-FLEX *EDGE*


Silver / Gold / Blue

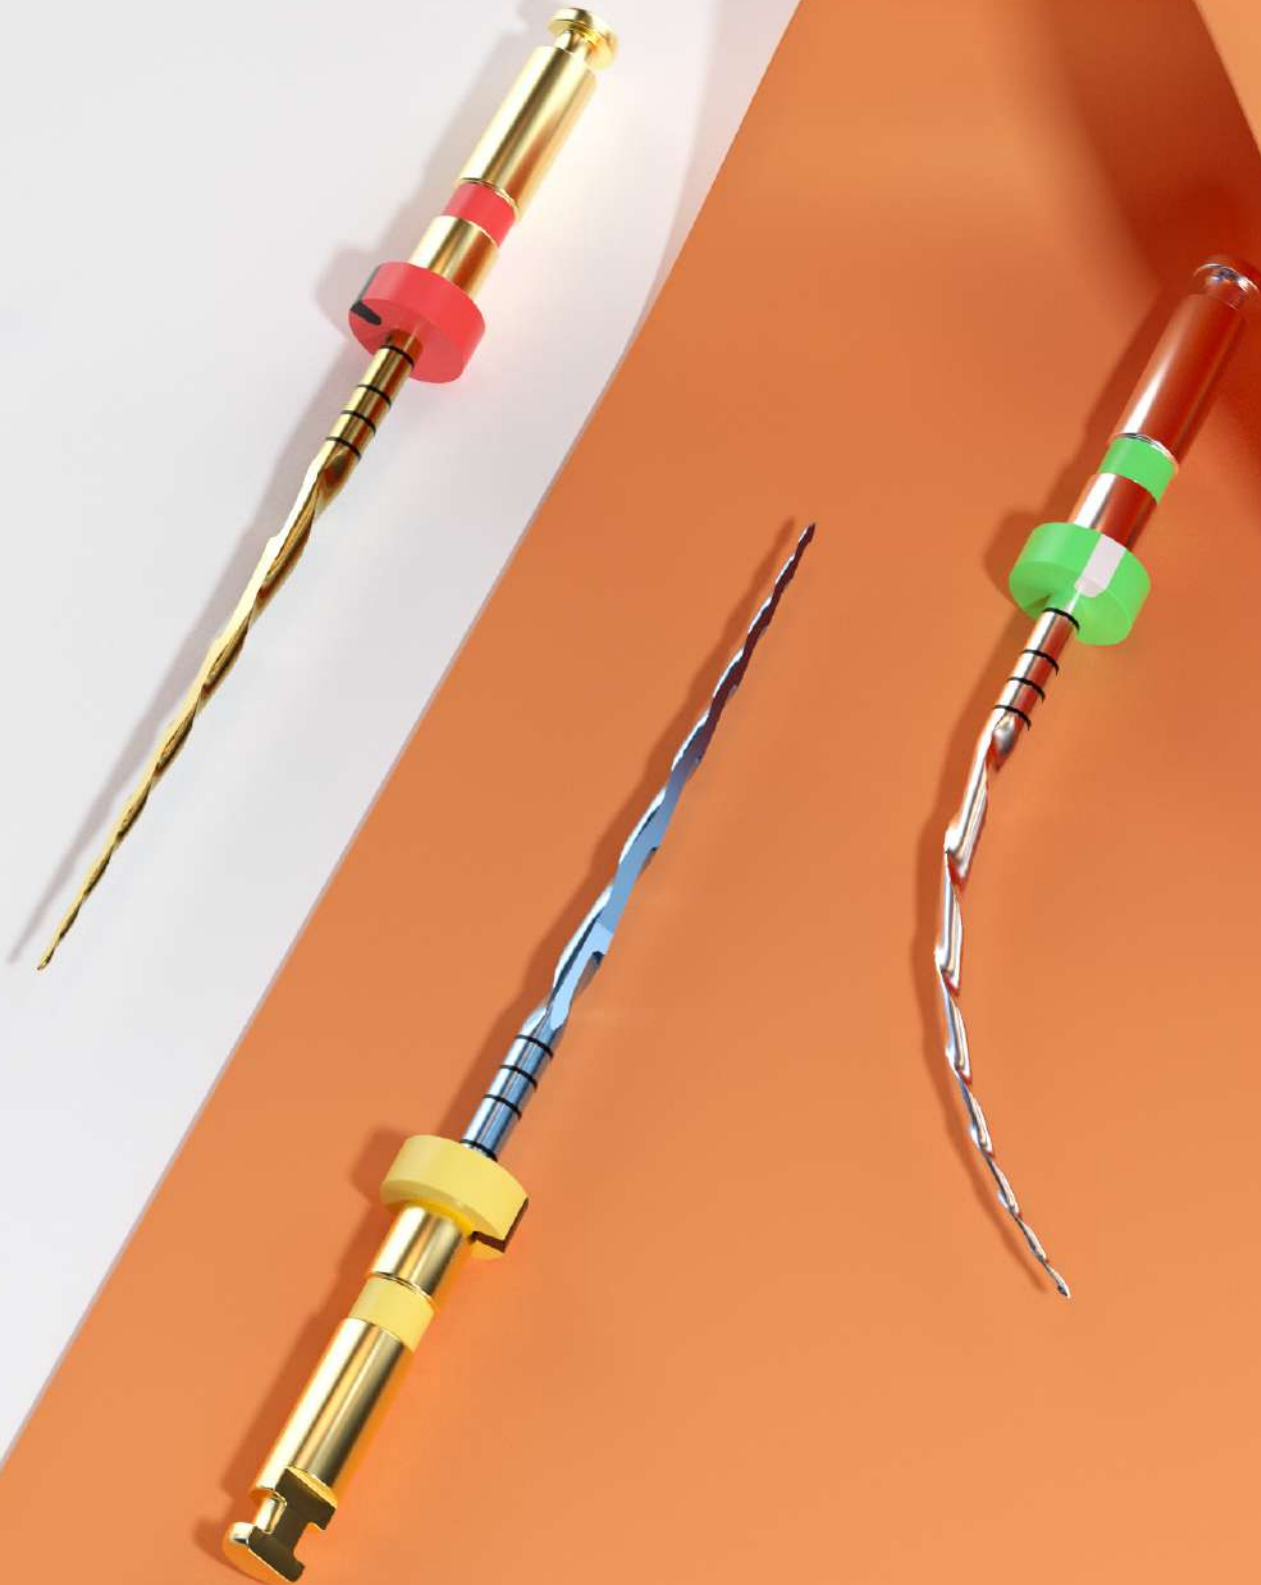


Different heat treatments are available: E-FLEX EDGE Silver/ Gold / Blue

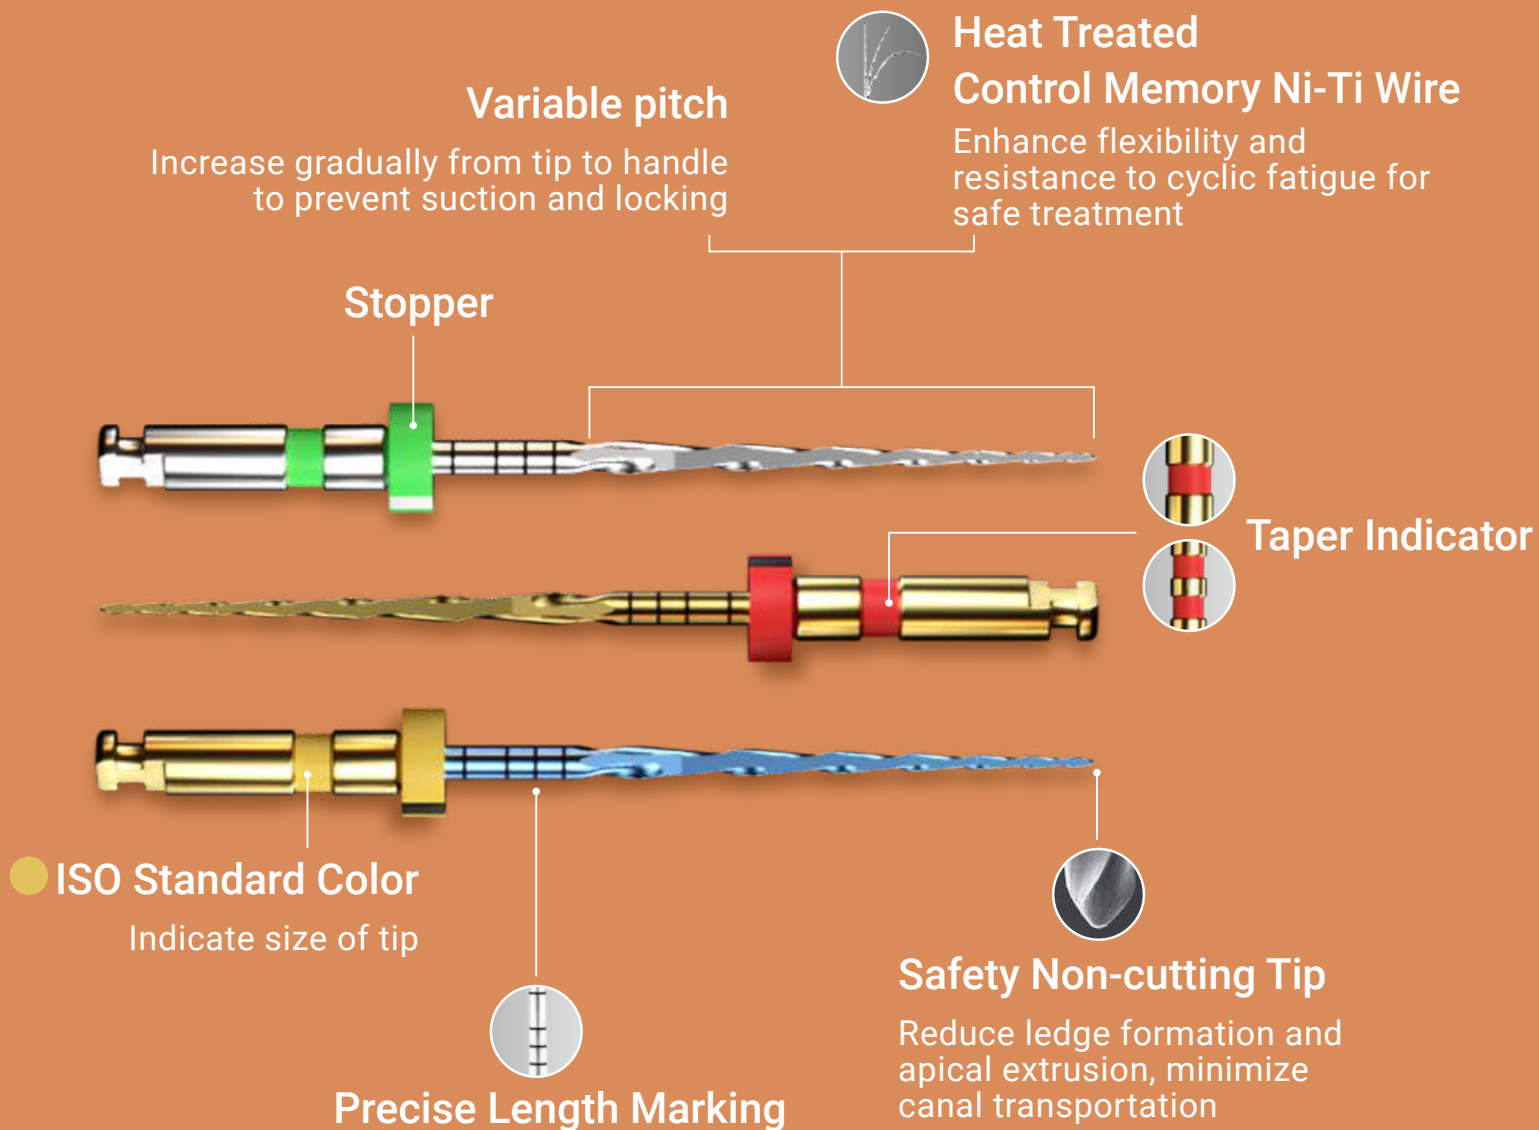


• Usage Protocol

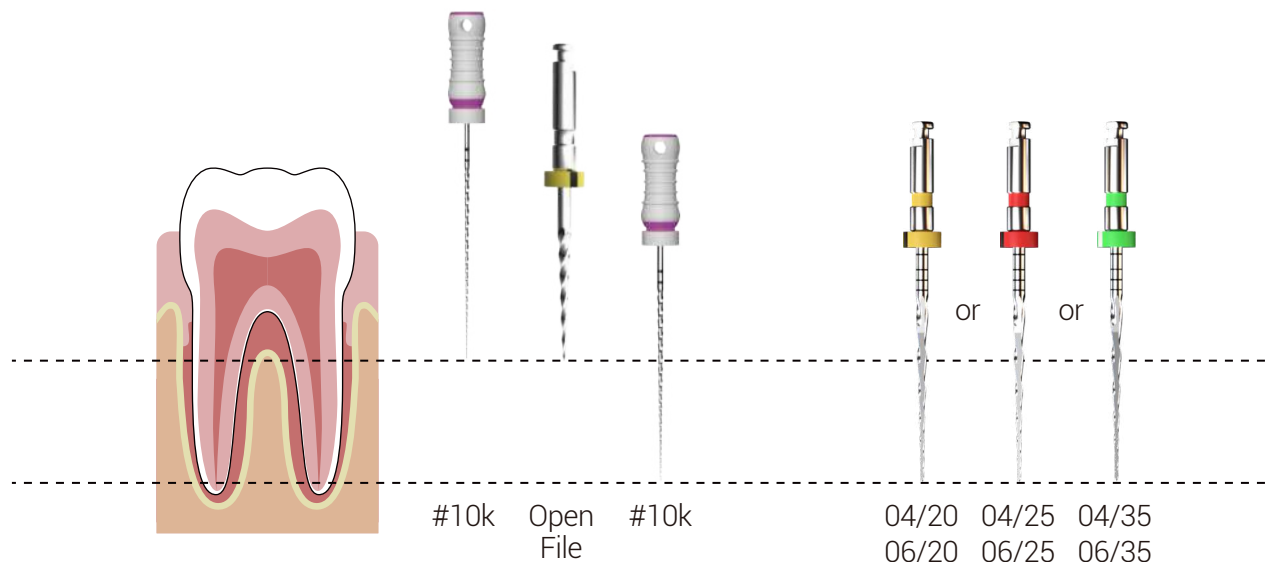

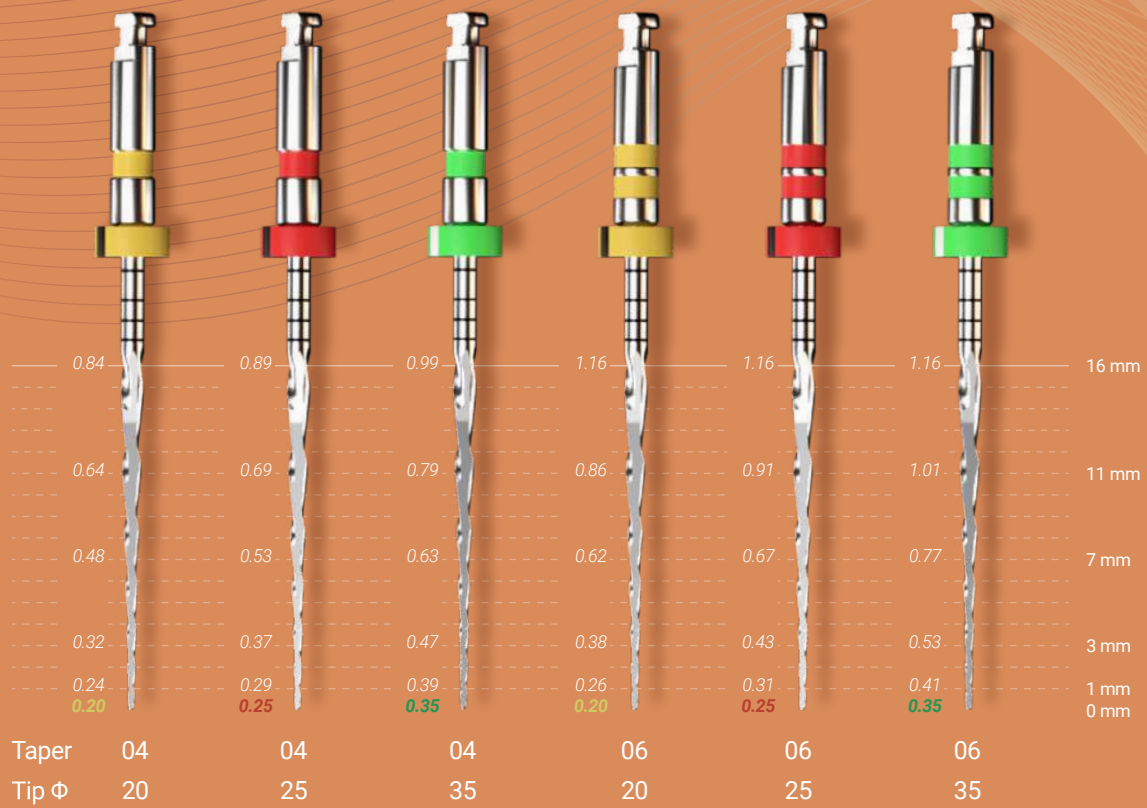

	Color	Tip Size	Taper (%)	Taper Indicator	Length (mm)	Suggested Speed/Torque
E-FLEX EDGE	●	20	4		21/25/31	400 rpm 2.5 N·cm
	●	25	4			
	●	35	4			
	●	20	6			
	●	25	6			
	●	35	6			

Features of E-FLEX EDGE superior flat-sided design

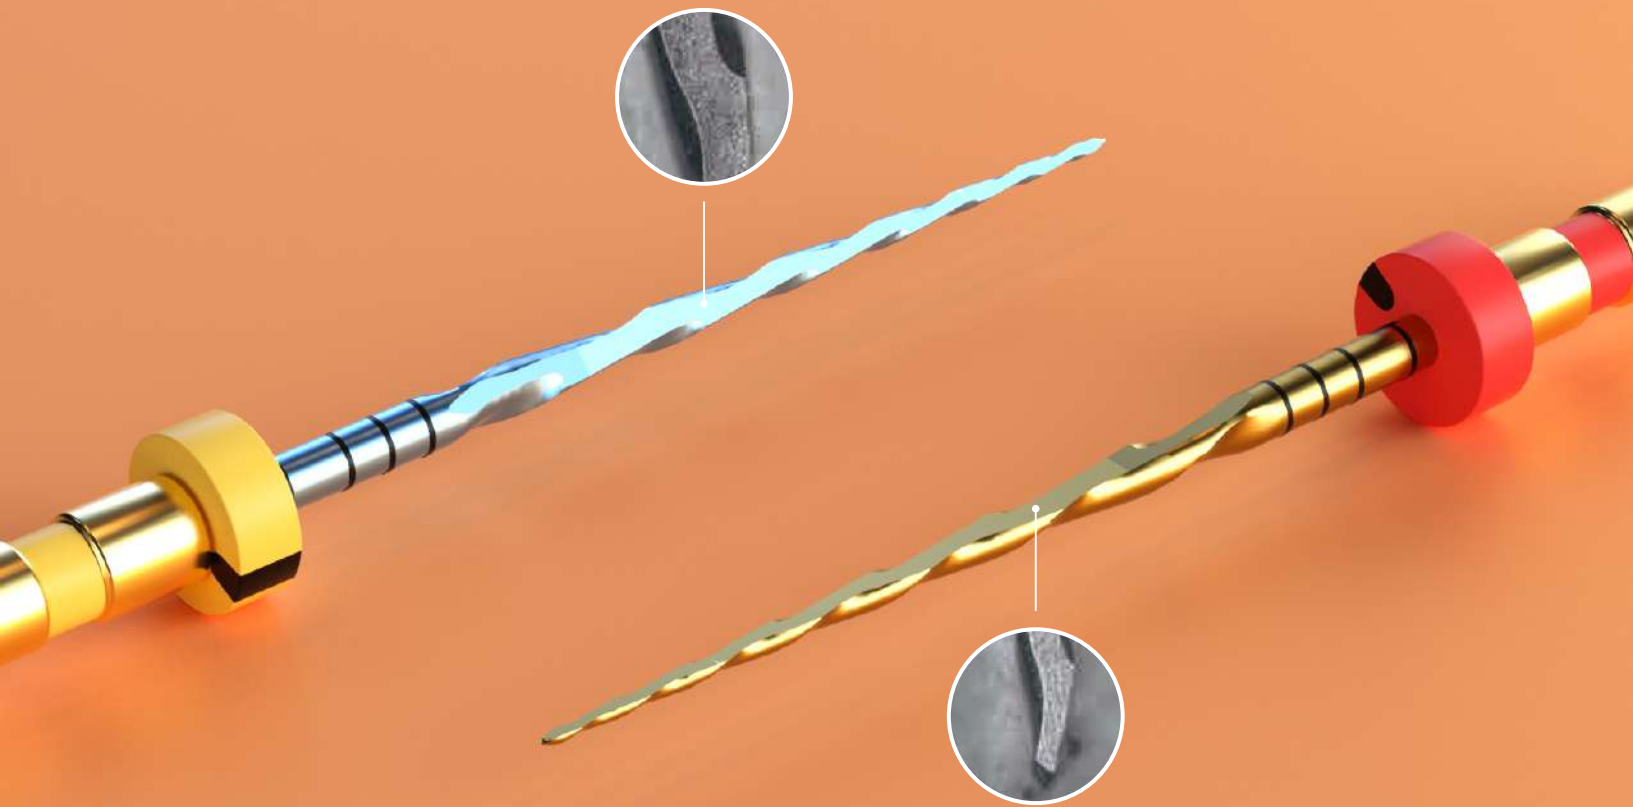

Excellent cutting efficiency, shorten the time for preparation

Better resistance for cyclic fatigue


Decrease screw-in effect significantly

More room for debris removal


Easy to do bypass or retrieval when the instrument was separated

Reduce canal transportation and apical extrusion


E-FLEX GOLD

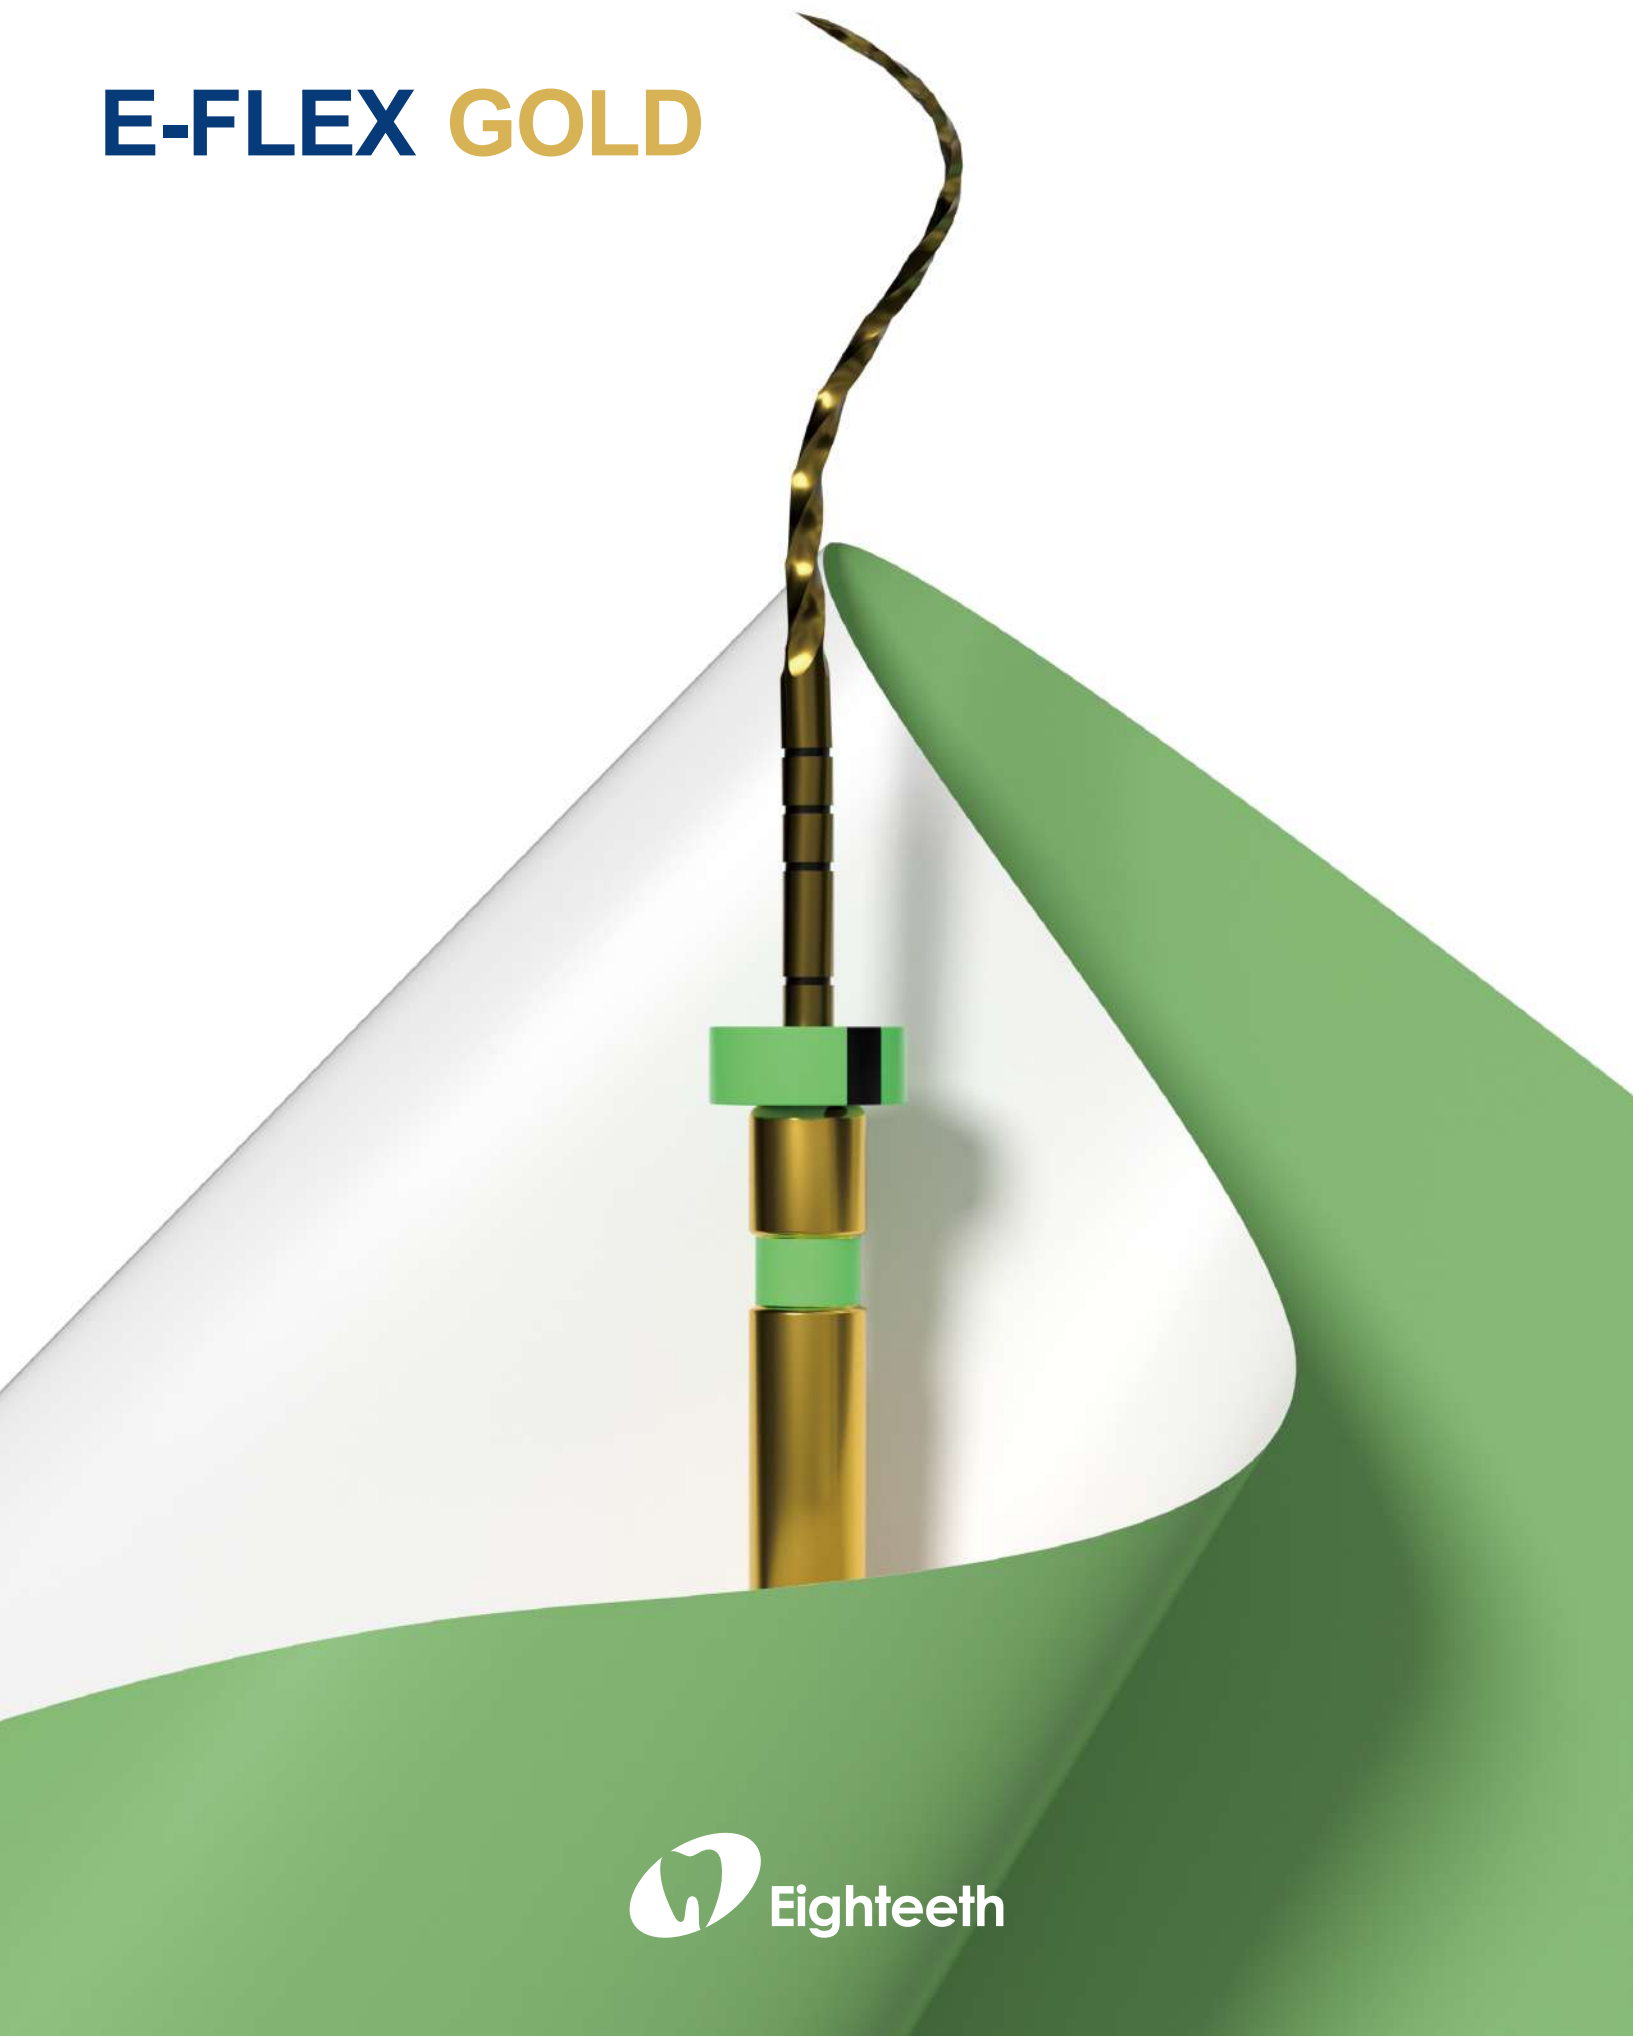


Gold Heat Treatment allows safe navigation of any curved canal

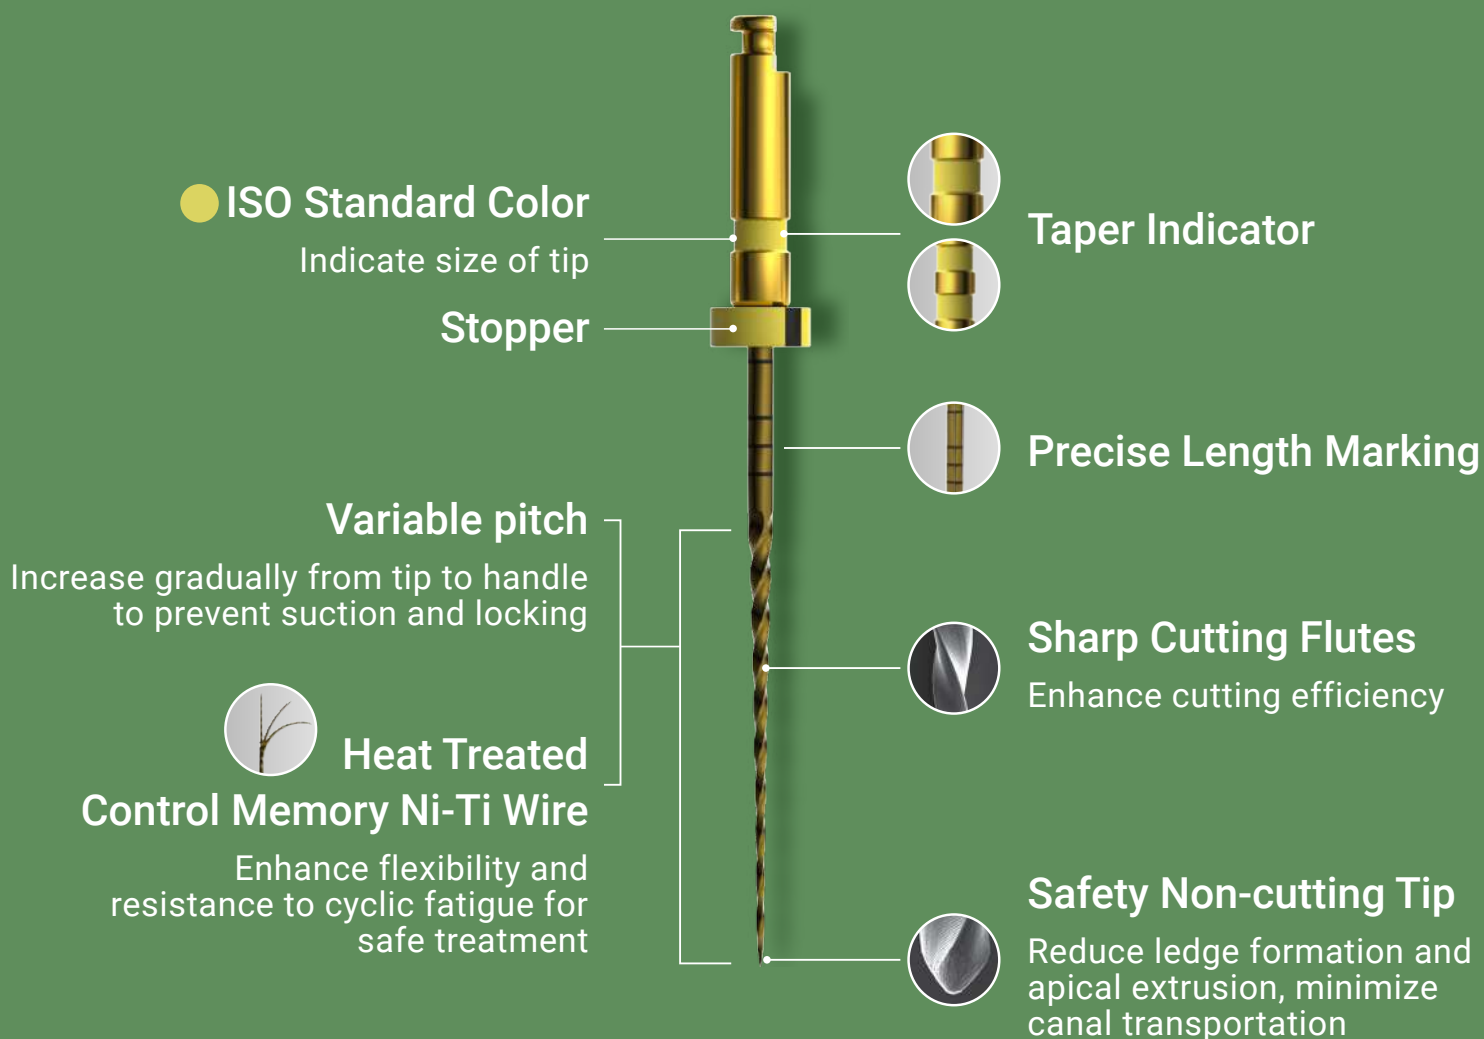

• Usage Protocol

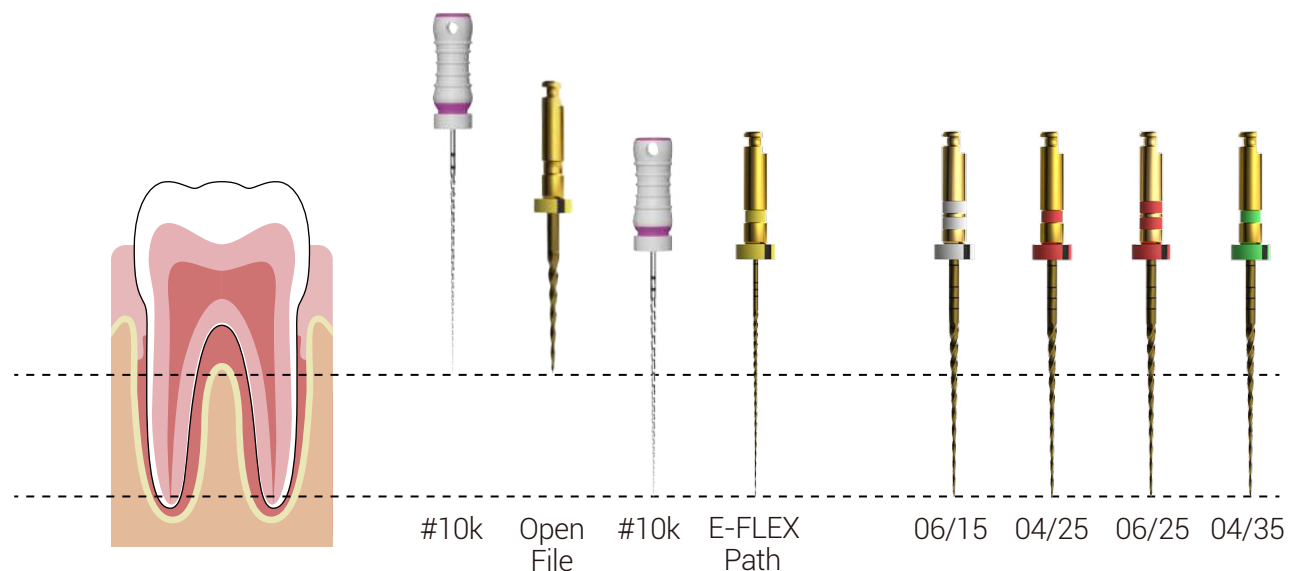

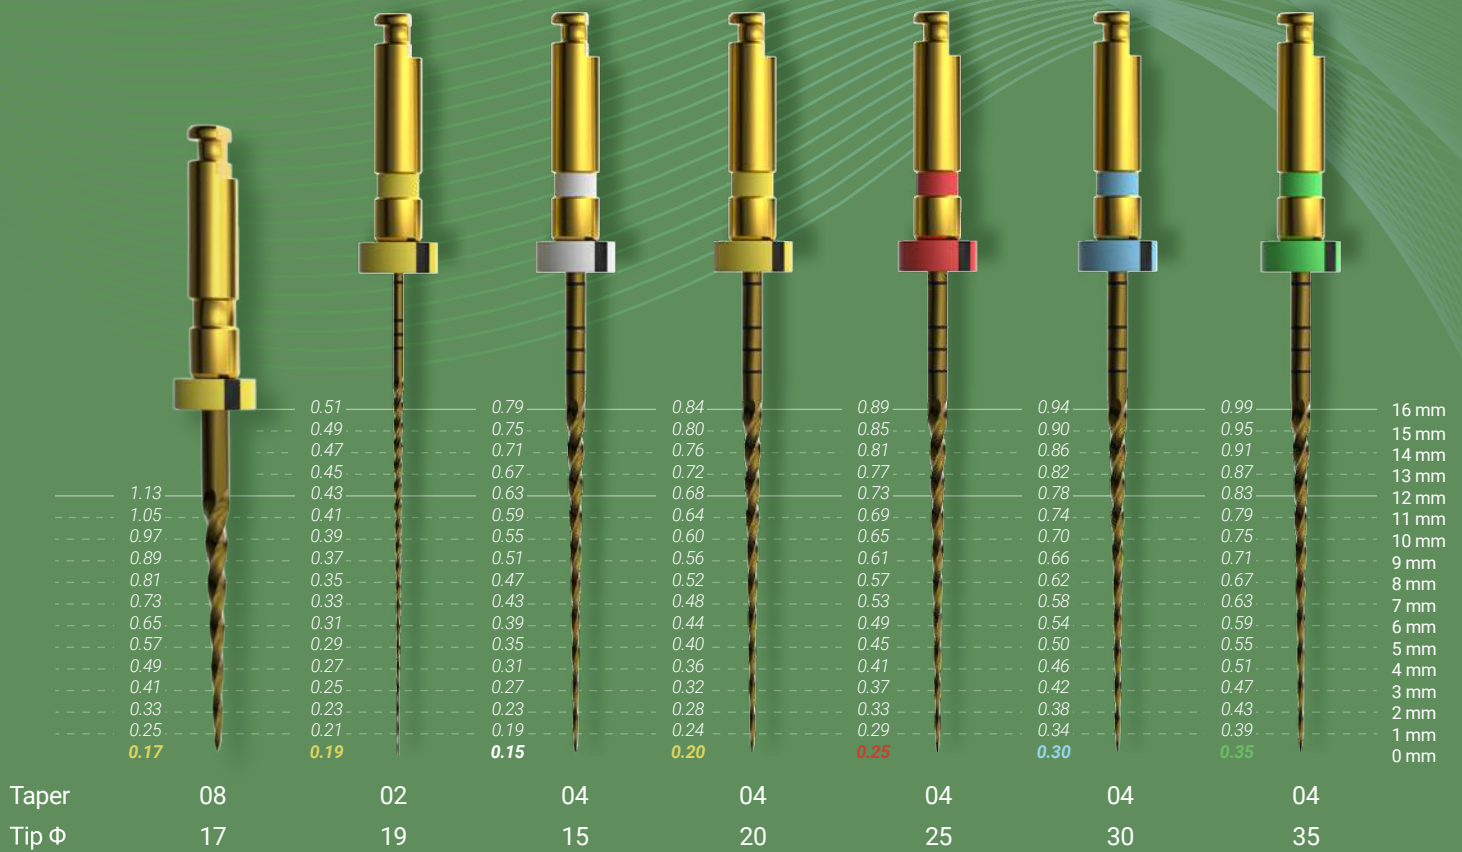

	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX GOLD	●	17	8			19	300 rpm, 3 N·cm
	●	19	2			21/25/31	350 rpm 2.5 N·cm
	○	15	4				
	●	20	4				
	●	25	4				
	●	30	4				
	●	35	4				




	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX GOLD	○	15	6			21/25/31	350 rpm 2.5 N·cm
	●	20	6				
	●	25	6				
	●	30	6				
	●	35	6				


E-FLEX MINI




For deciduous teeth

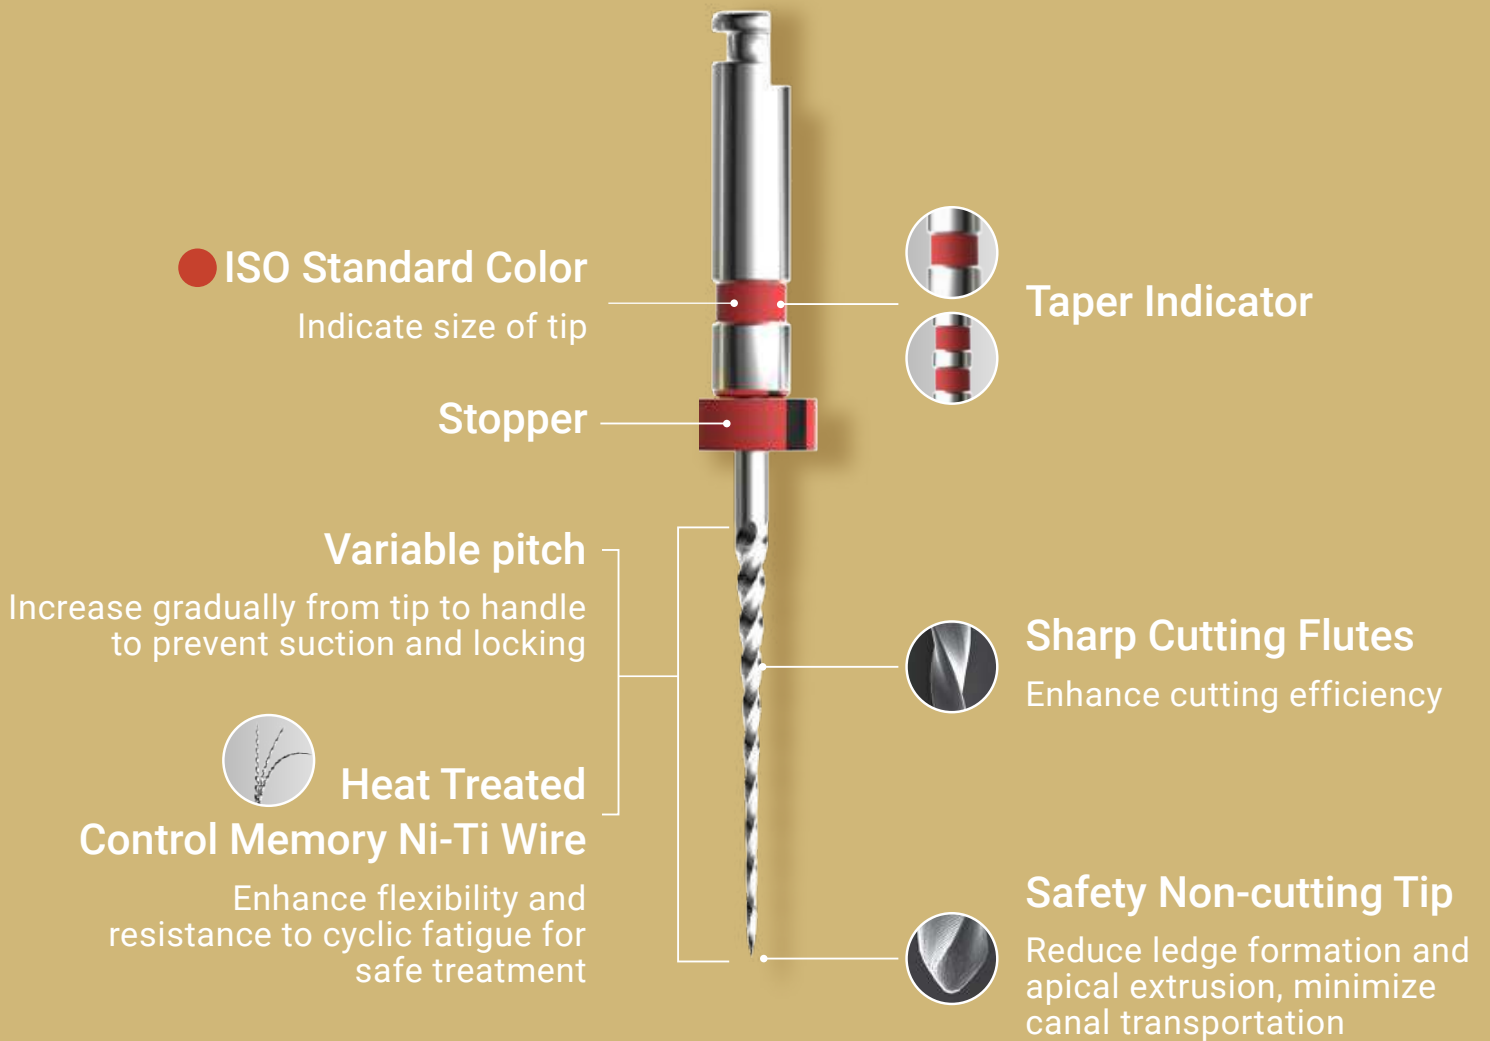

• Usage Protocol

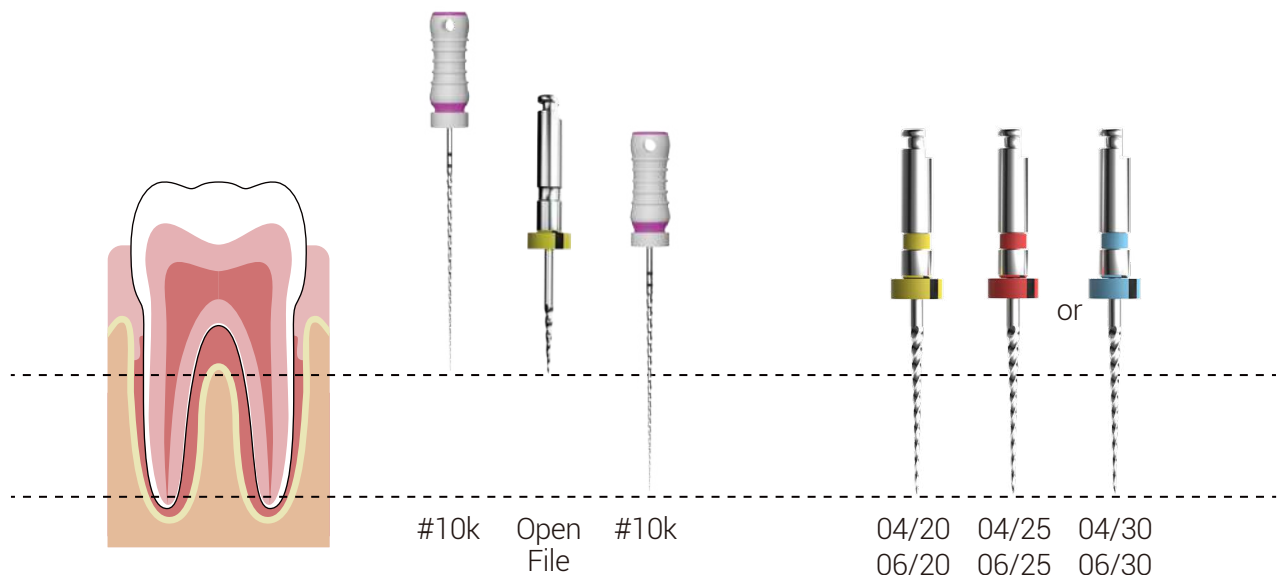

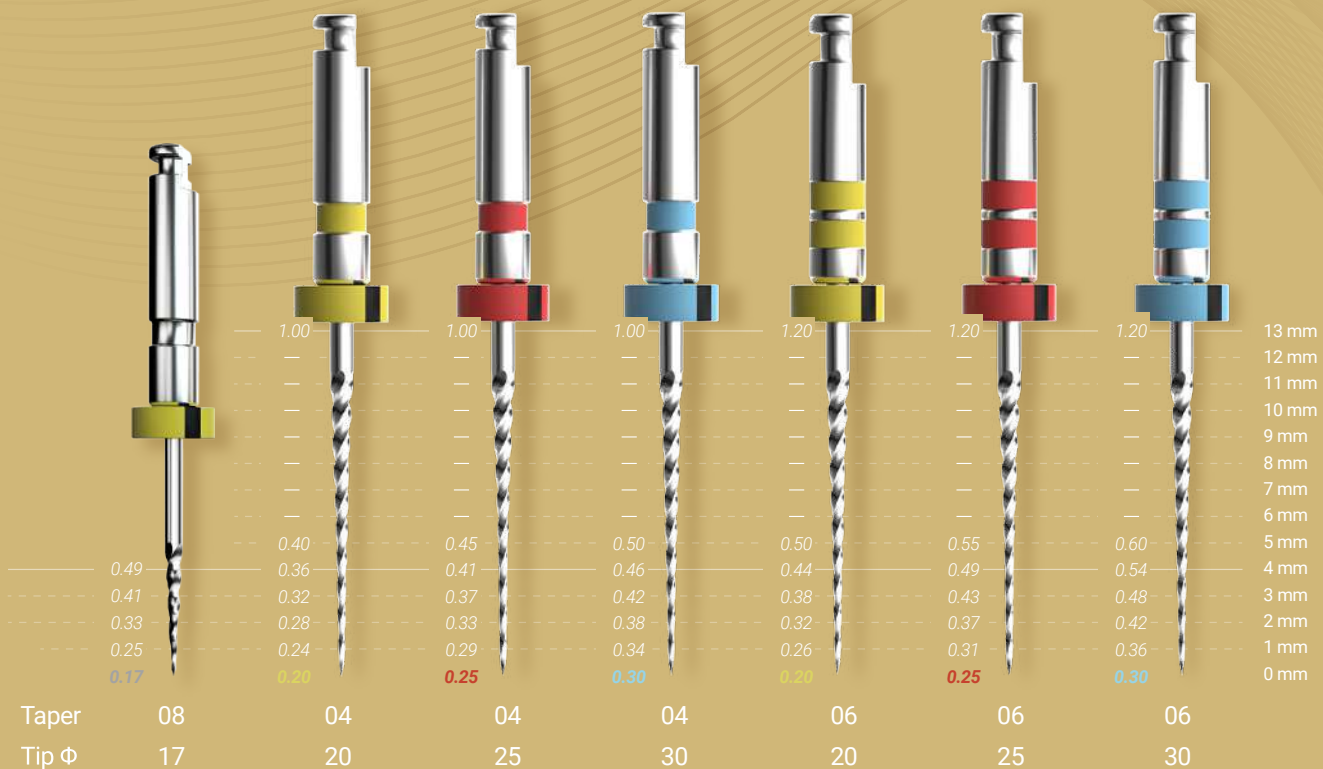


	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX MINI	●	17	8			10	300 rpm, 3 N·cm
	●	20	4			16	350 rpm 2.5 N·cm
	●	25	4				
	●	30	4				
	●	20	6				
	●	25	6				
	●	30	6				

E-FLEX ONE





One file for incredible efficiency

Blue Heat Treatment for increased flexibility and safety

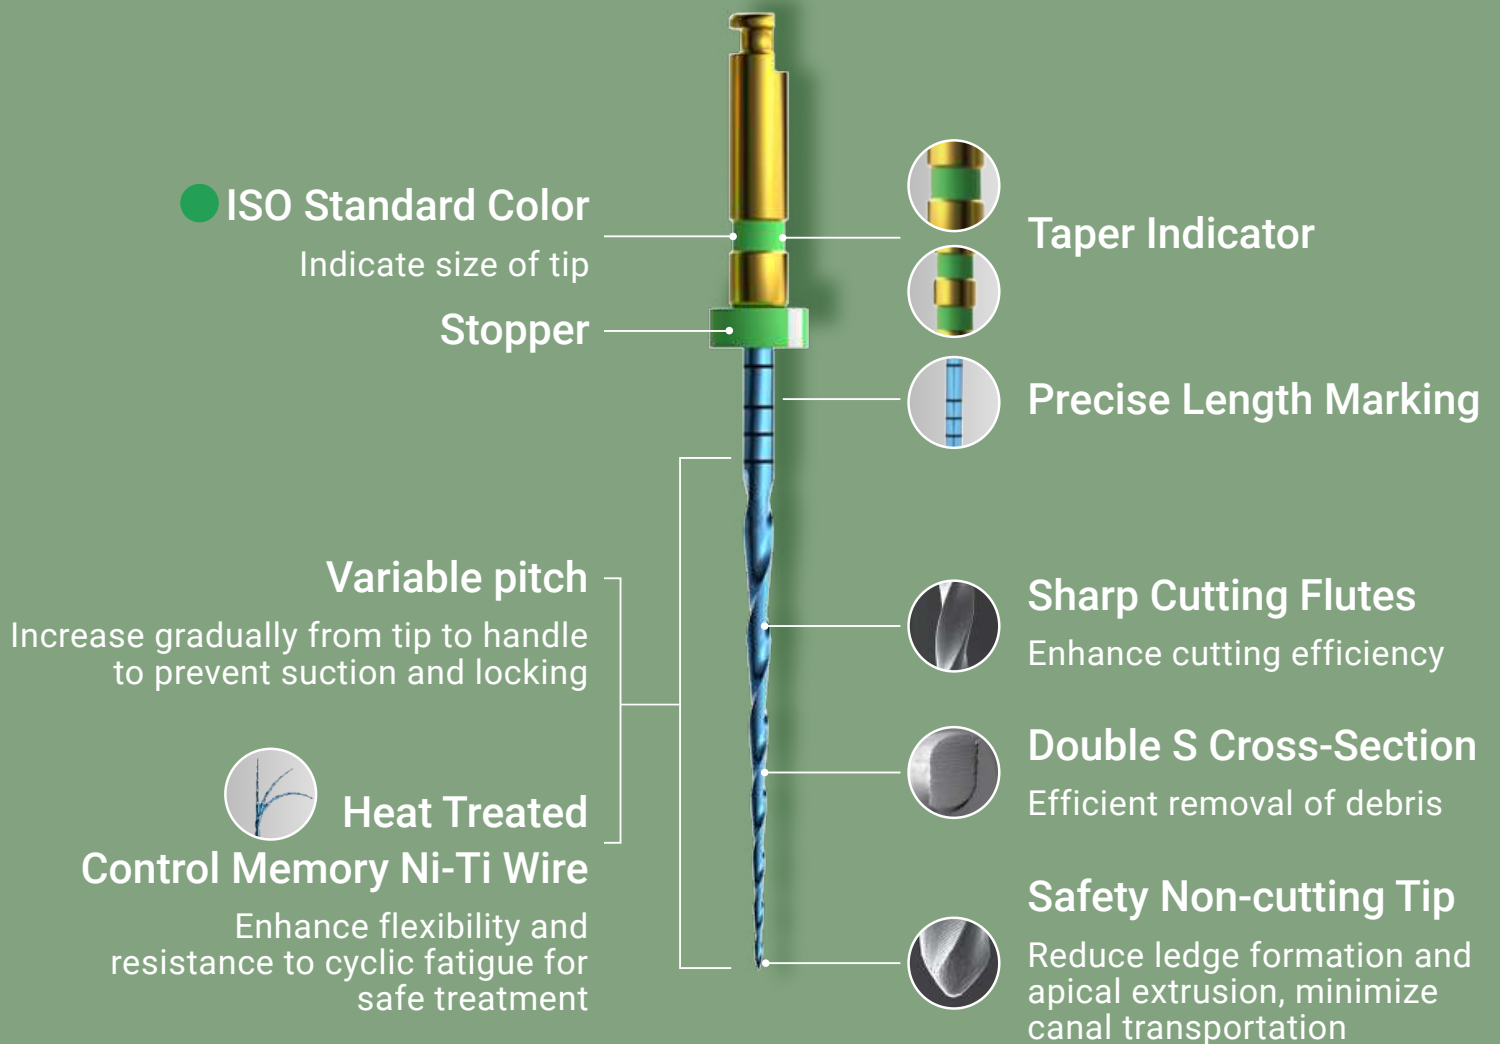

• Usage Protocol

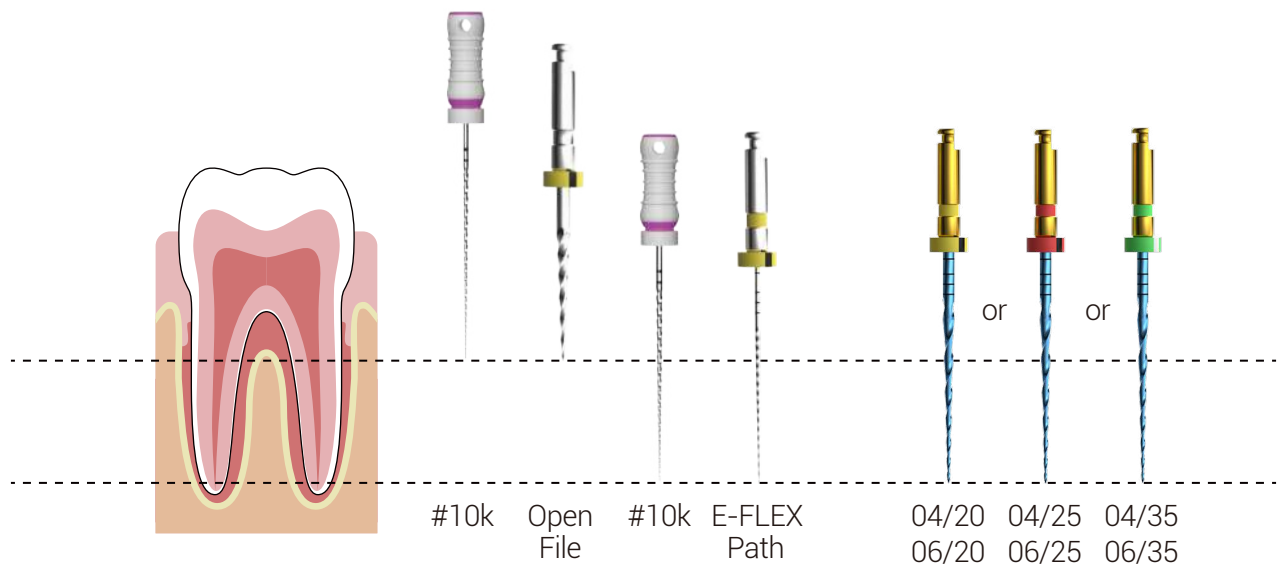

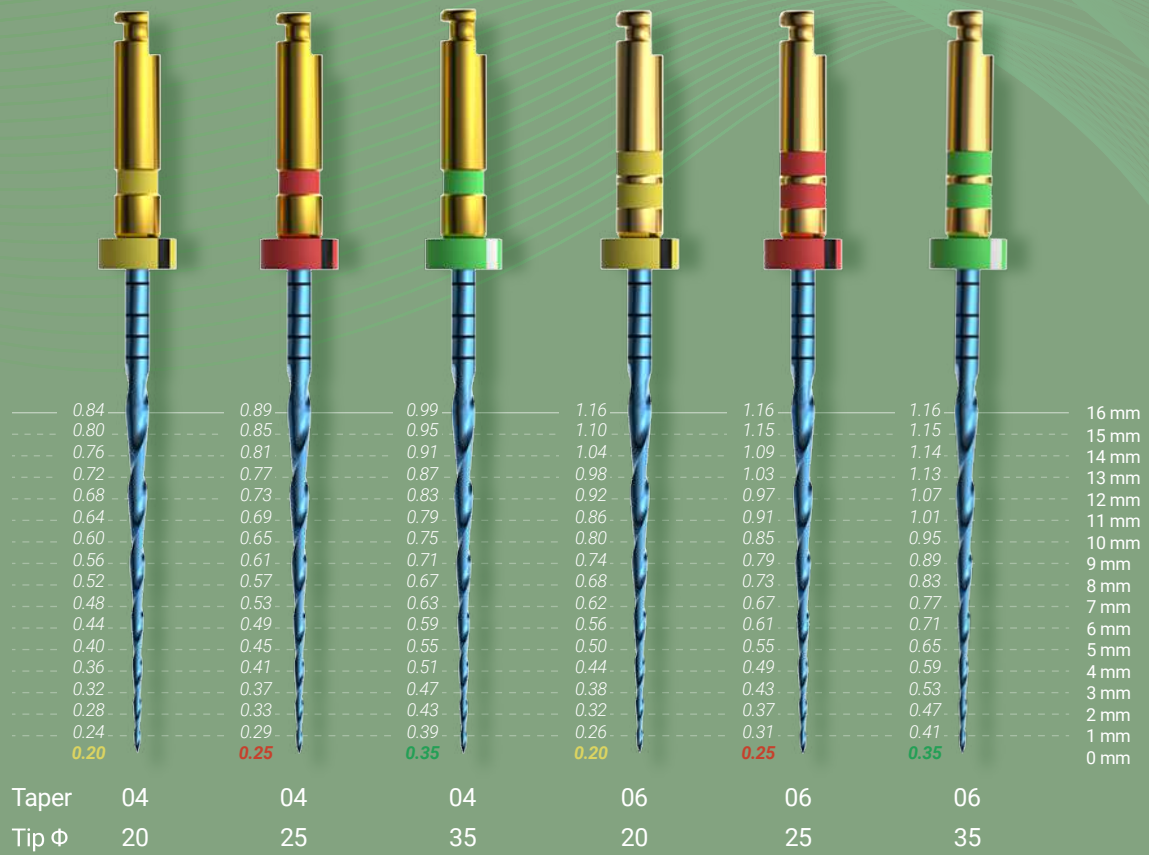

	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX ONE	●	20	4			21/25/31	400 rpm 2.5 N·cm
	●	25	4				
	●	35	4				
	●	20	6				
	●	25	6				
	●	35	6				

E-FLEX




PATH FILE




Eighteeth





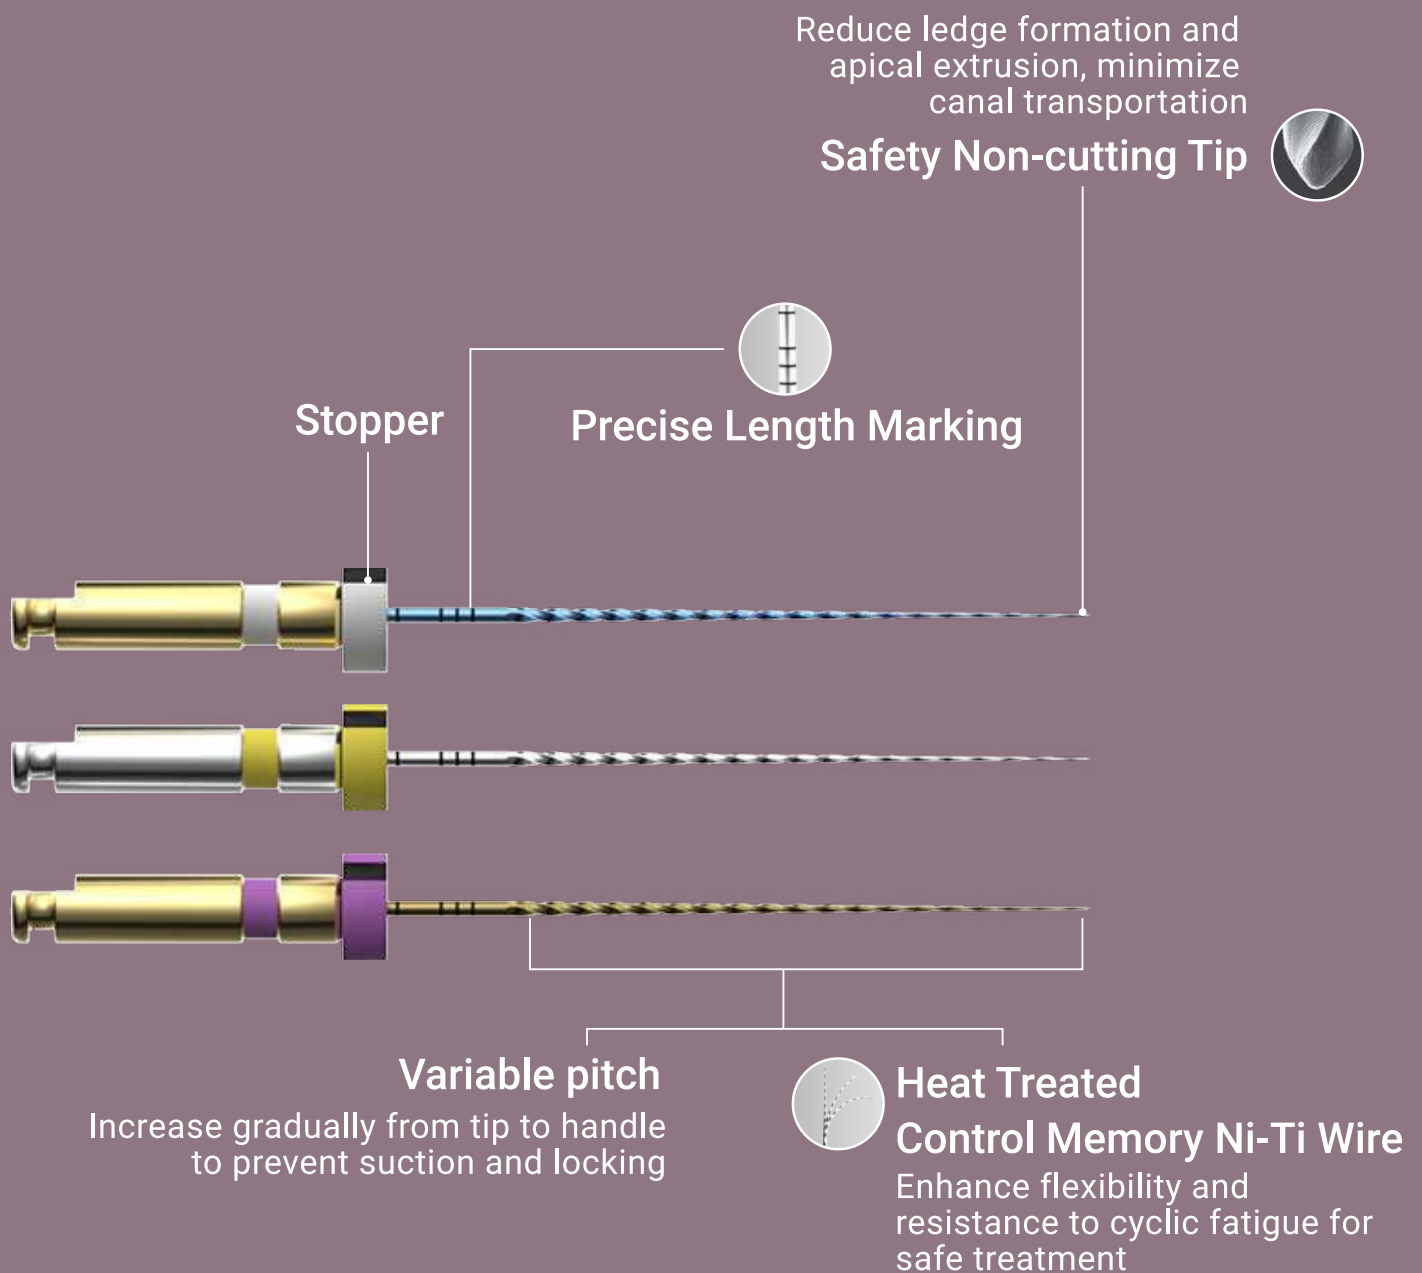



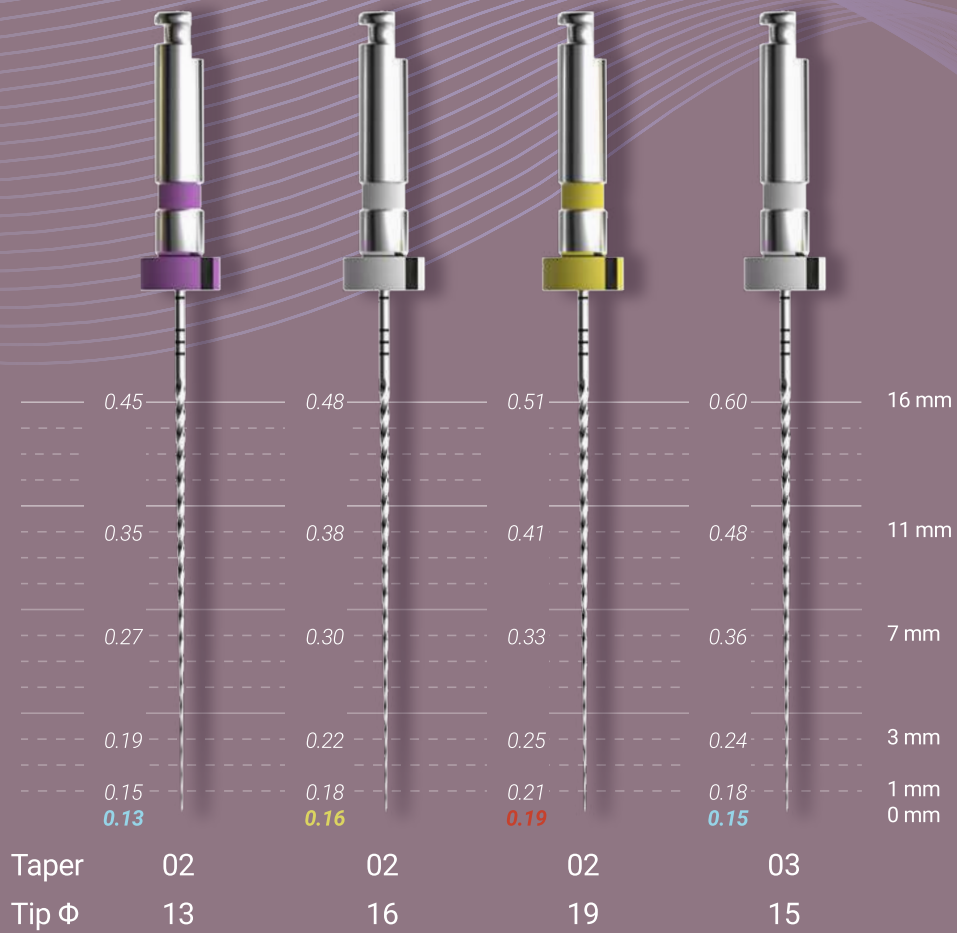



Advantages over the manual file

- Intensive flexibility and more resistance to cyclic fatigue
- Follow the contour of root canal, retain more dentin
- Shorten preparation time significantly
- Less canal transportation
- Suitable for curved canals



Different heat treatments are available: E-FLEX PATH Silver/ Gold / Blue




	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX PATH		13	2			21/25/31	350 rpm 2.5 N·cm
		16	2				
		19	2				
		15	3				

E-FLEX REC



One file reciprocation for incredible efficiency



- **ISO Standard Color**

Indicate size of tip

- **Stopper**

- **Taper Indicator**

- **Precise Length Marking**

- **Variable pitch**

Increase gradually from tip to handle to prevent suction and locking



- **Heat Treated Control Memory Ni-Ti Wire**

- **Control Memory Ni-Ti Wire**

Enhance flexibility and resistance to cyclic fatigue for safe treatment

- **Sharp Cutting Flutes**

Enhance cutting efficiency


- **Double S Cross-Section**

Efficient removal of debris

- **Safety Non-cutting Tip**

Reduce ledge formation and apical extrusion, minimize canal transportation

• Usage Protocol

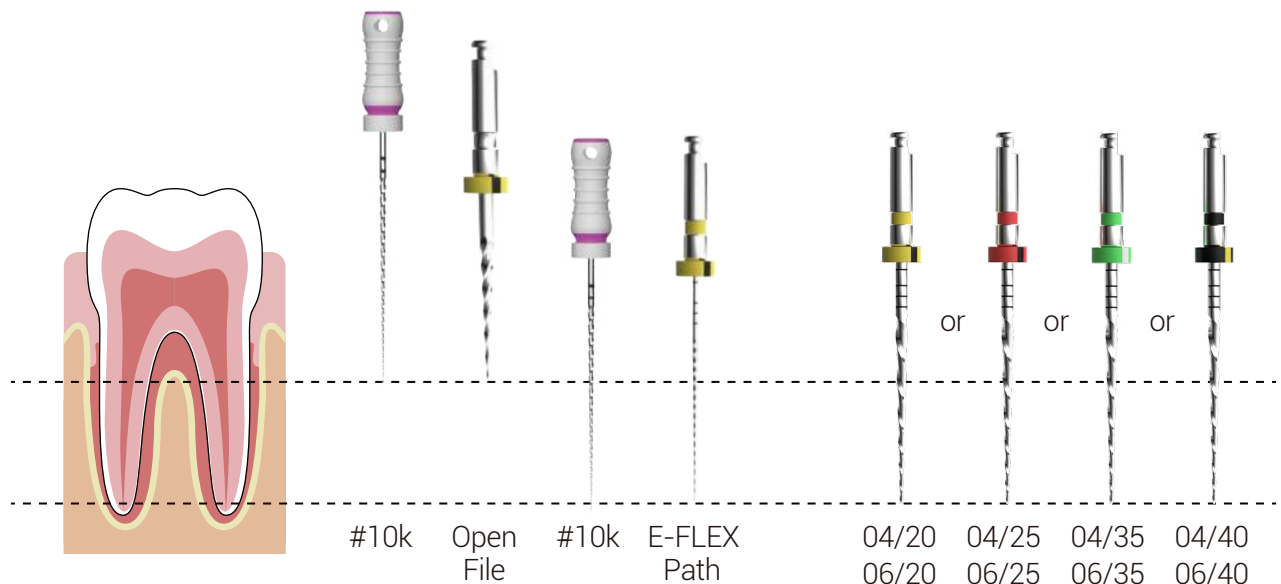




	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Angle
E-FLEX REC	●	20	4			21/25/31	FWD: 30° REV: 150°
	●	25	4				
	●	35	4				
	●	40	4				
	●	20	6				
	●	25	6				
	●	35	6				
	●	40	6				



E-FLEX RT



Safe and effective removal of obturation materials Reducing the need for solvents

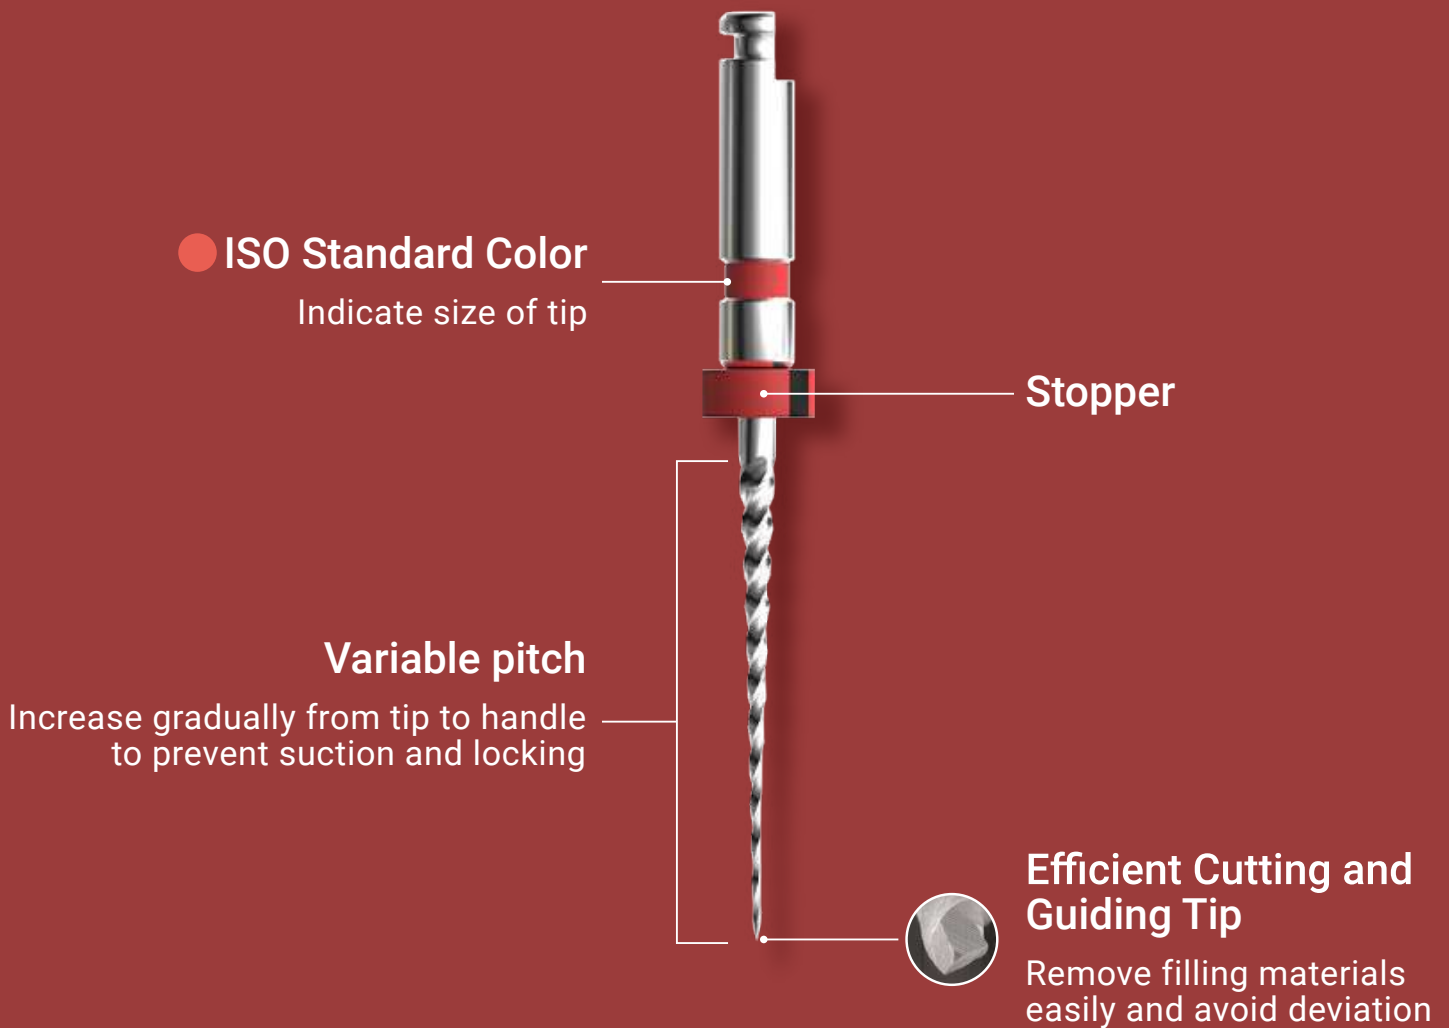

• Usage Protocol

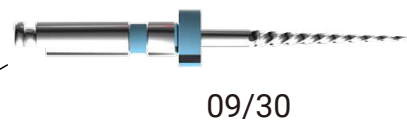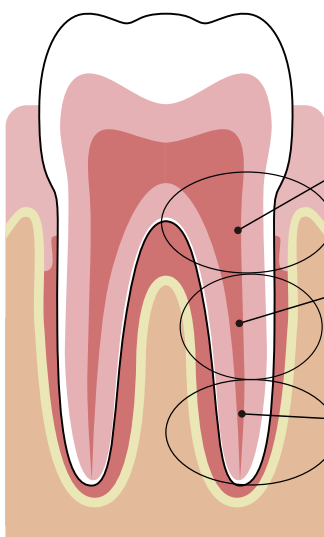

For Coronal 1/3




For Middle 1/3



For Apical 1/3

Retreatment File

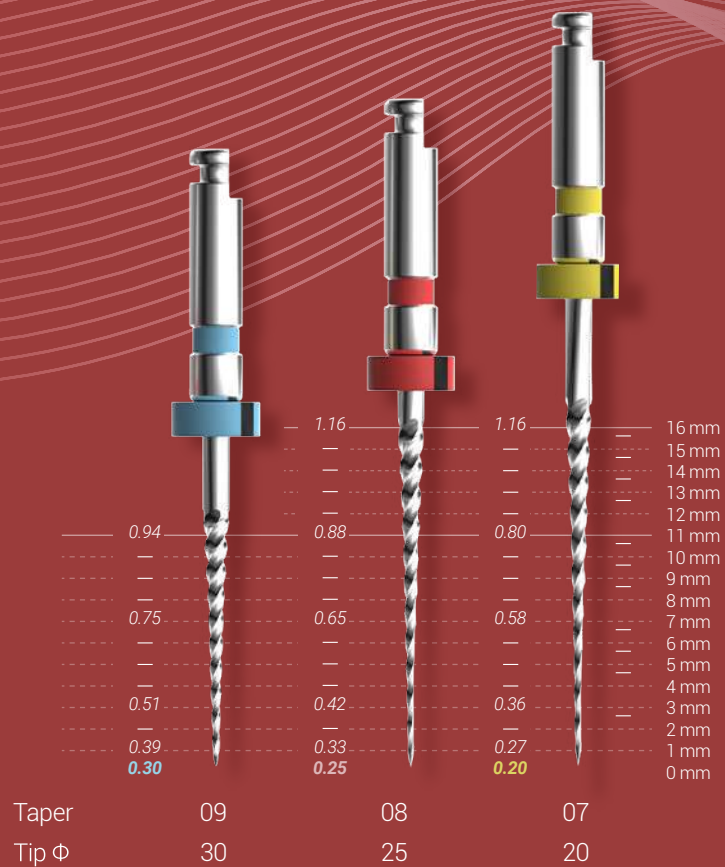


	Color	Tip Size	Taper (%)	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX RT	●	30	9	◊	16	350 rpm 2 N·cm
	●	25	8	◊	18	
	●	20	7	◊	22	

E-FLEX *S*




3 Shaping files for a deep shape

3 Finishing files for navigating challenging curves in the apical region

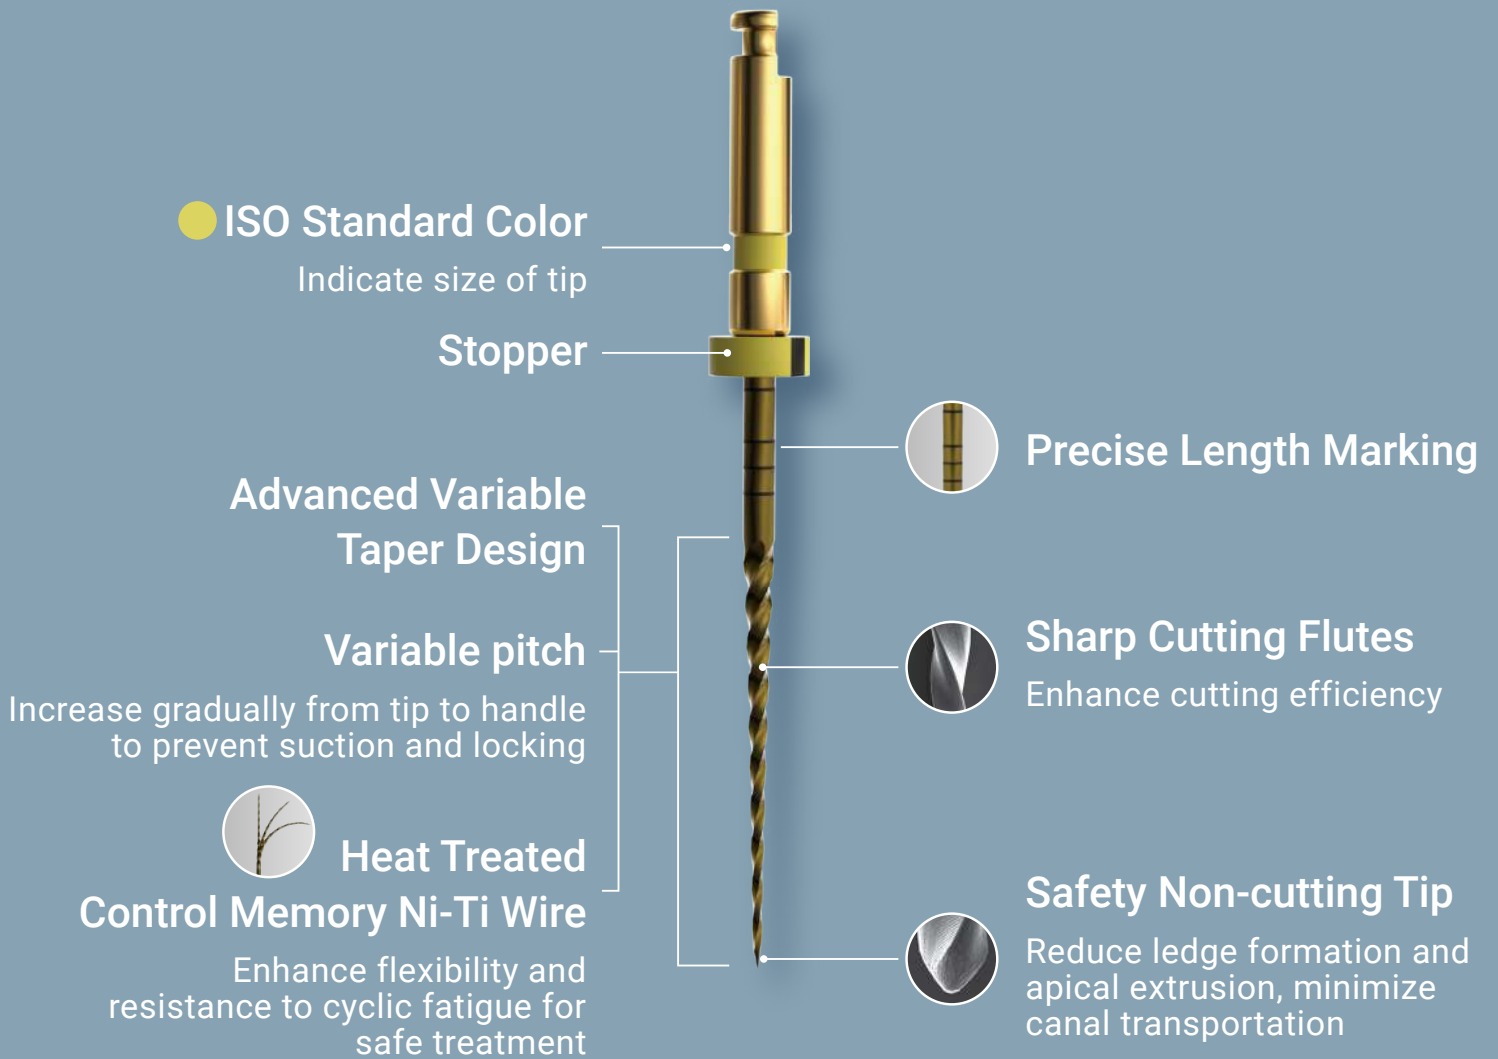

• Usage Protocol

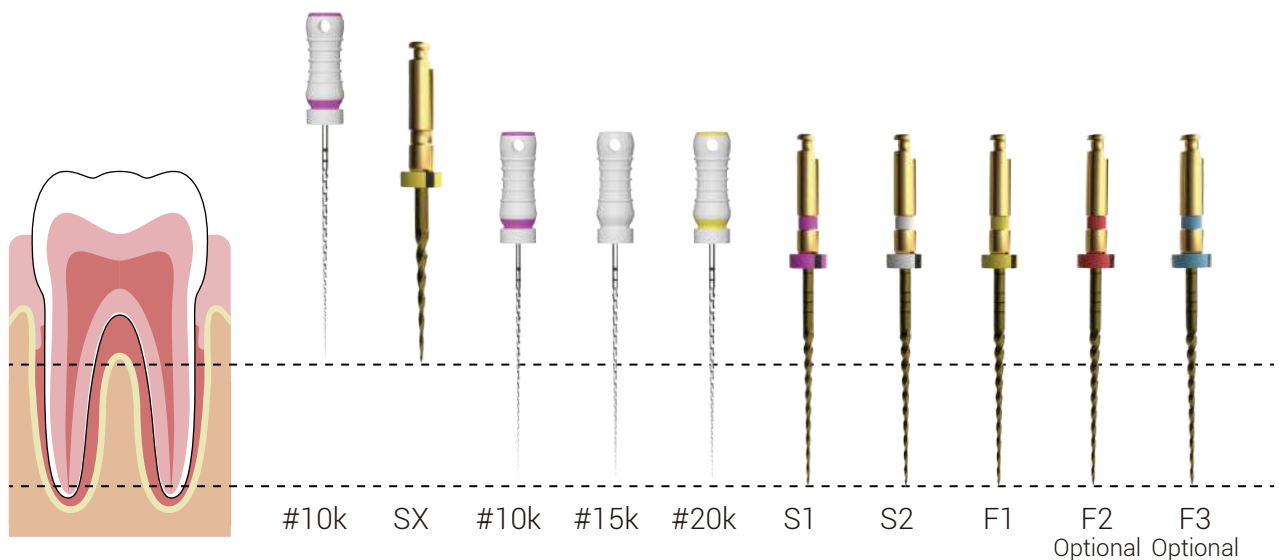



	Color	Tip Size	Taper (%)	Cross-Section	Length (mm)	Suggested Speed/Torque
E-FLEX S	●	16	Variable Taper		19	350 rpm 2 N·cm
	●	18			21/25/31	
	○	20				
	●	20				
	●	25				
	●	30				